

## What Certification means to me?

National Poly Industries is one of only a few tank manufacturers that are certified to both the Australian Tank Standard AS/NZS 4766:2006 and ISO 9001:2008. This provides you with an additional guarantee that you are dealing with a manufacturer with an absolute commitment to quality.



www.nationalpolyindustries.com.au/  
why-choose-us/certifications

## Tank Quality Assurance

As an ISO 9001 certified manufacturer, National Poly Industries are independently audited to ensure their manufacturing processes and material suppliers all comply with the standards required which ensures a very transparent and traceable quality process. We have always led the way in quality tanks and are one of the few tank manufacturers to test every tank.

The wall thickness of each tank is measured in many crucial locations. An impact test is performed on a cut-out section of each tank, to ensure the polymer chains are not brittle and have bonded together correctly. A visual inspection is also performed to ensure there are no abnormalities.

Buying a certified National Poly Industries tank ensures that you will receive a high quality, well tested product that will last its warranty period of 20 years.

www.nationalpolyindustries.com.au/  
warranty-conditions

## Chemical Commercial Tanks

Tanks made for all industries



## EvolutionMkII rainwater tank system with Davey RainBank



**Ideal for metropolitan rainwater harvesting for homes, toilet blocks and garden irrigation.**

- ✓ RainBank automatically switches between rainwater and mains water supply, so you don't need to think about it.
- ✓ Fits neatly in the top of the tank for a space-saving, sleek design.
- ✓ Built-in backflow protection valve (dual check valve) in compliance with the requirements of AS/NZS 3 500-1-2003 for added safety and assured protection of your mains water supply.

## Pump Covers



Length: 640 mm Width: 340mm  
Height: 600 mm Weight: 4 kgs

## Recommended Site Preparation

Correct site preparation is essential to ensure a long and trouble-free life for your water tank.

It is essential to have your water tank on a **FLAT LEVEL COMPACTED BASE**. The base of your water tank must be fully supported at all times. Concrete Slab must be at least 25 mpa and 100mm (4") thick with F62 mesh halfway through the mix. It should be screeded flat and level with no high or low spots. The finished surface should have a trowelled finish.

Crusher dust bases must be 300mm (12") wider than diameter of the water tank and prepared as follows:


1. Remove at least 100 mm (4") of natural earth, ensuring the base is flat and level.
2. Refill with at least 75 mm (3") of crusher dust thoroughly mixed with dry cement powder for a 4m (13') base we suggest 2-3 bags of cement powder.
3. Once spread, thoroughly compact the crusher dust with suitable compacting equipment, not by any other means.
4. Thoroughly screed the surface and ensure the finished surface is perfectly FLAT AND LEVEL and free of stones, tree roots, etc. Do not water to set the cement powder, natural moisture will do this when your tank is in position.

**Note: Sand is not acceptable.**

**INSPECT THE BASE REGULARLY** checking for, and rectifying, any undermining by water run-off or animals burrowing such as toads, mice etc.

**Molasses tanks** must have a concrete slab or suitably constructed tank stand with flat level deck to be considered for warranty.

**Molasses tanks** must have a concrete slab or suitably constructed tank stand with flat level deck to be considered for warranty.

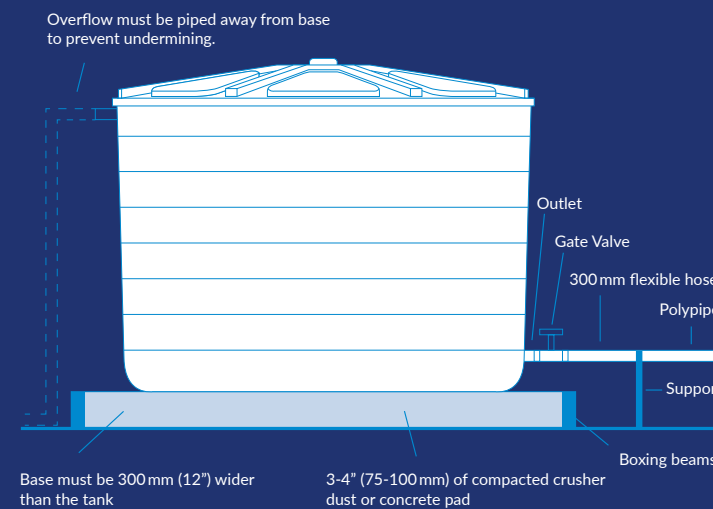

## Warranty

### ABOUT THIS WARRANTY

1. NATIONAL POLY INDUSTRIES PTY LTD ACN 107 251 267 trading as NATIONAL POLY INDUSTRIES ("National Poly Industries") warrants that, subject to the terms of this warranty, it will either, at its sole discretion, replace or repair any water tank affected by a defect or fault caused by poor workmanship for a period limited to:

- 1.1 twenty (20) years from the date of purchase for all water tanks other than Li-LoTM Underground and Slimline water tanks;
- 1.2 fifteen (15) years from the date of purchase for Li-LoTM underground water tanks; or
- 1.3 ten (10) years from the date of purchase for Slimline water tanks.

2. A purchaser of a water tank (in this warranty referred to as "you") will only be entitled to make a claim under this warranty if the defect or fault first appears, and National Poly Industries is informed of the claim, within the duration of that warranty period and in accordance with paragraph 4 of this warranty.

3. This warranty does not apply to National Poly Industries industrial tanks. For warranties pertaining to National Poly Industries industrial tanks ask about our separate industrial tank warranties.

### HOW TO MAKE A CLAIM

4. To make a warranty claim under this warranty, you must:

- 4.1 notify National Poly Industries in writing at the address shown at the end of this warranty (noting that updates to that address may have been notified via the National Poly Industries website) within fourteen (14) days of the existence of any defect or fault becoming apparent and provide National Poly Industries with the opportunity to inspect the defective or faulty water tank within twenty-eight (28) days (or sooner if reasonably requested by National Poly Industries) of such notification; and
- 4.2 send the original invoice evidencing the purchase of your water tank to National Poly Industries at the address shown at the end of this warranty.

5. You must bear all expenses of making a claim, whether valid or otherwise, under this warranty.

### WHEN THIS WARRANTY DOES NOT APPLY

6. This warranty has no application in any of the following circumstances:

- 6.1 the defect or fault is caused by you or any person (other than National Poly Industries) by using your water tank other than for its manufactured purpose;
- 6.2 your water tank is damaged during relocation, including, but not limited to, installation and/or transportation;
- 6.3 your water tank is not installed or maintained in accordance with National Poly Industries' Recommended Site Installation Sheet which is available at our website: [www.nationalpolyindustries.com.au](http://www.nationalpolyindustries.com.au);
- 6.4 the defect or fault is caused by an act of God, an act of war, storm, hail, tree roots (where the tank is installed too close to existing or subsequently planted trees), wind (where not securely anchored or weighted down by water immediately on delivery as per National Poly Industries' Recommended Site Installation Sheet) or other natural event or force of nature;
- 6.5 the defect or fault is caused by reasonable weathering/degradation over time;

- 6.6 the defect or fault is caused by negligence (other than by National Poly Industries), abuse, wilful damage or other deliberate act;
- 6.7 the defect or fault is caused by someone walking on or applying any load to the top of the water tank;
- 6.8 the serial number or identification marked on your water tank is removed, defaced or altered;
- 6.9 the defect or fault is the result of inadequate or incorrect site preparation;
- 6.10 if your water tank is made out of polyethylene and it does not have a minimum of 300mm of flexible hose or a single sphere expansion joint fitted in line as close to the outlet fitting as possible;
- 6.11 pipe work which is connected to your water tank is not adequately supported so as to not to put undue pressure or strain on fittings;
- 6.12 the overflow capacity of your water tank is less than the inflow, causing excessive hydraulic pressure;
- 6.13 your water tank is transported with liquids in it;
- 6.14 if your water tank is a Li-LoTM Underground tank and it is:
  - (a) subjected to excessive trafficable loads;
  - (b) not properly maintained by you;
  - (c) subjected to unauthorised modifications;
  - (d) installed:
    - (i) without you first having obtained both a structural survey of soil composition and a civil engineering report detailing any additional requirements as to the installation of the tank, in accordance with the requirements identified in the Li-LoTM Underground Tank Installation Manual which is available at our website: [www.nationalpolyindustries.com.au](http://www.nationalpolyindustries.com.au) ("Li-LoTM Manual"); or
    - (ii) without limiting the foregoing paragraph, otherwise than in accordance with the requirements set out in the Li-LoTM Manual;
- 6.15 regardless of the type of water tank:
  - (a) your water tank is not installed using the National Poly Industries' Recommended Site Installation Sheet. These are supplied when the tank is delivered are available at our website: [www.nationalpolyindustries.com.au](http://www.nationalpolyindustries.com.au); or
  - (b) your water tank is placed on an unsound base or the base erodes and/or is not maintained by you or is subjected to unauthorised modifications;
- 6.16 the defect or fault is the result of after sale modifications, repairs or the installation of fittings which are not suitable for the water tank or weaken its integral properties; or
- 6.17 the defect or fault is caused by the storage of water at temperatures in excess of 40° Celsius.

### WHO THIS WARRANTY BENEFITS

7. This warranty is provided to the original purchaser only and is not transferable.

For additional rights and limitations on claims, please visit:

<http://www.nationalpolyindustries.com.au/warranty-conditions/>

## STRONG, AFFORDABLE, UV-RESISTANT RAINWATER TANKS

nationalpolyindustries



Collectively the **NPI GROUP** deliver tanks to most of Australia

CLARK TANKS  
FAR BETTER BY DESIGN

TANKS DIRECT

TEAM POLY  
Water Solutions For Life

CLARK INDUSTRIAL  
Tanks

POLY-CRAFT

AUSTRALIAN WATER SYSTEMS



## Don't just fit a Tank, maximise your water catchment and enhance water quality.



Leaf Eater

Tank Screen Cover

Tank Gauge

First Flush Water Diverter

Tank Guardian Easy Clean

## Round Rainwater Tanks

- ✓ Designed to withstand harsh Australian conditions
- ✓ Weight guaranteed
- ✓ No vertical side seams
- ✓ Self supporting, no pole
- ✓ **FAST FREE DELIVERY\*** (limited area, access permitting)



Thicker walls at base for greater strength

## Multi-Purpose Troughs

Heavy, suitable for molasses, liquid feed, food and water.

**590 Litre (130 Gallon)**  
Width: 1.10m, Height: 0.66m, Weight: 20kgs  
**1,170 Litre (260 Gallon)**  
Width: 1.58m, Height: 0.60m, Weight: 37kgs



Your Agent:

## Fatigue Management Policy

National Poly Industries is committed to meeting our duty of care under the Chain of Responsibility and Compliance and Enforcement Legislation.

Activities that may contribute to a breach include, but is not limited to:

- Exerting pressure on drivers to overload or speed.
- Placing unrealistic delivery time frames on drivers
- Accepting overloaded trailers
- Accepting inadequate restrained loads
- Delays during loading and unloading.

With the support and co-operation of all parties we can ensure we all work towards improving safety while encouraging a culture of compliance and continuous improvement in the transport industry.

Head Office: **1800 651 004**  
89 Childers Rd, Bundaberg Qld 4670  
[www.nationalpolyindustries.com.au](http://www.nationalpolyindustries.com.au)



**FAST FREE DELIVERY\*** (limited area, access permitting)  
\*Conditions apply, subject to change.

**You Can't Buy Better than the Best**

Tank & Pump packages available

✓ The NPI Group have you covered for any Tank and Pump combo.



DAVEY





## Why buy from National Poly Industries?

- ✓ Tanks are designed for strength, with thicker walls at the base. Tanks are engineered using finite element analysis to ensure long term structural integrity.
- ✓ Every tank has a weight guarantee – your assurance of quality.
- ✓ Every tank has a self supporting roof (with no internal poles).
- ✓ One piece tank construction (with no vertical side seams).
- ✓ A 20 year warranty on all round tanks, 15 year warranty on Underground and 10 year warranty on Slimlines (Conditions Apply).
- ✓ 100% UV protection against the harsh Australian conditions.
- ✓ Tanks are made of 100% food grade material (Australian Standard AS2070/AS4020).
- ✓ All tanks are manufactured to comply with the Australian Tank Standard AS/NZ 4766:2006.
- ✓ We offer you friendly, personal and dependable service.
- ✓ Competitive rainwater tank and accessory prices.
- ✓ A vast network of agents with experienced personal who can help you choose the right tank for your needs.
- ✓ Pumps available at competitive prices.



**37,200 Litre (8,200 Gallon)**  
Inlet height: 2.52m (8'4")



Diameter at base: 4.33m (14'3")

Price: \$

**32,700 Litre (7,200 Gallon)**  
Inlet height: 2.25m (7'5")



Diameter at base: 4.33m (14'3")

Price: \$

**24,500L (5,400 Gallon) Squat**  
Inlet height: 2.36m (7'10")



Diameter at base: 3.80m (12'6")

Price: \$

**22,700 Litre (5,000 Gallon) Super Squat**  
Inlet height: 2.09m (6'10")



Diameter at base: 3.86m (12'8")

Price: \$

**14,500 Litre (3,200 Gallon)**  
Inlet height: 2.09m (6'10")



Diameter at base: 3.09m (10'2")

Price: \$

**10,000 Litre (2,200 Gallon) Squat**  
Inlet height: 1.40m (4'7")



Diameter at base: 3.09m (10'2")

Price: \$

**10,000 Litre (2,200 Gallon) Upright**  
Inlet height: 2.20m (8'2")



Diameter at base: 2.52m (8'4")

Price: \$

**8,600 Litre (1,900 Gallon)**  
Inlet height: 2.60m (8'6")



Diameter at base: 2.08m (6'10")

Price: \$

**7,200 Litre (1,600 Gallon)**  
Inlet height: 2.18m (7'2")



Diameter at base: 2.17m (7'1")

Price: \$

**5,500 Litre (1,200 Gallon)**  
Inlet height: 1.88m (6'2")



Diameter at base: 2.08m (6'10")

Price: \$

**5,000 Litre (1,100 Gallon)**  
Inlet height: 1.63m (5'4")



Diameter at base: 2.08m (6'10")

Price: \$

**5,000 Litre (1,100 Gallon) Upright**  
Inlet height 1.92m (6'5")



Diameter at base 1.86m (6'1")

Price: \$

**3,000 Litre (660 Gallon)**  
Inlet height: 2.02m (6'7")



Diameter at base: 1.45m (4'9")

Price: \$

**1,800 Litre (400 Gallon)**  
Inlet height: 1.48m (4'10")



Diameter at base: 1.38m (4'7")

Price: \$

**1,500 Litre (330 Gallon)**  
Inlet height: 1.94m (6'5")



Diameter at base: 1.04m (3'5")

Price: \$

**1,000 Litre (220 Gallon)**  
Inlet height: 1.48m (4'10")



Diameter at base: 1.00m (3'3")

Price: \$

**1,000 Litre (220 Gallon)**  
Inlet height: 1.90m (6'3")



Diameter at base: 0.87m (2'11")

Price: \$

**Tank & Pump packages available**

✓ The NPI Group have you covered for any Tank and Pump combo.

**DAVEY**

## Get the tank that fits – Slimline Under Eave Tanks



**5,000 Litre 5B (1,100 Gallon)**  
Width: 1.10m, Length: 2.98m  
Height: 2.095m, Weight: 200kg

Price: \$



**3,000 Litre 3B (660 Gallon)**  
Width: 0.85m, Length: 2.53m  
Height: 2.00m, Weight: 110kg

Price: \$



**2,000 Litre 3B (440 Gallon)**  
Width: 0.68m, Length: 2.18m  
Height: 1.70m, Weight: 100kg

Price: \$



Brass Ball Valve of 1 1/4" Standard



Brass Outlet of 1 1/4" Standard




Stainless Steel Meshed Strainer



Stainless Steel Meshed Overflow



**10 YEAR WARRANTY**



**NO BPA**

## ThinTanks

Easy installation & space-saving, ThinTanks tanks are the thinnest available water tank for any capacity.

**ThinTank 1000L Slimline (220G)**  
H: 975 mm, L: 2400 mm, Width: 260 mm

**ThinTank 2000L Slimline (440G)**  
H: 1975 mm, L: 2400 mm, W: 470 mm

## ThinPots

The ThinPots Vertical Garden System is a series of pots designed to hang on the front of the ThinTanks, cleverly turning your tank into a **vertical garden**.

Each pot allows for an irrigation dripper to be installed at the top, and two small drainage holes in the bottom.

- Smooth Cream
- Desert Haze
- Wheat
- Beige
- Merino
- Light Grey
- Slate Grey
- Mountain Blue
- Black
- Mist Green
- Heritage Green
- Rivergum
- Stormedge Blue
- Heritage Red
- More Colours Available

Sizes shown are approximate sizes. Capacities listed are approximate maximum volumes. Prices quoted include GST. Specifications are subject to change. \*Conditions Apply. \*\*Product certification applies to selected range.